

## Amphe-Dante Adapters

**Amphe-Dante** are Dante™ audio to analogue audio adapters, available for Input, Output, AES3 and USB applications. Featuring premium quality Amphenol AX series XLR and RJ45 connectors in a robust molded housing.

Amphe-Dante products enable simple connection of analogue equipment to a Dante network and can receive and transmit audio channels from a Dante network and provide studio-quality, low-latency audio via XLR connectors to and from analogue audio equipment.



Amphe-Dante feature high-quality digital-to-analogue converters, and support a range of sample rates and bit depths. They can provide a hardware master clock for a Dante network. As with other Dante products, the freely available Dante Controller software application is used to automatically discover and configure Amphe-Dante devices connected to the Dante network. Device names, channel labels, signal routing and other parameters (for example, sample rate and latency) can be configured via the network using Dante Controller. A variety of network and clock synchronisation diagnostic tools are also available in Dante Controller.

Amphe-Dante products use Power over Ethernet (PoE). Power can be provided through the Ethernet cable from a PoE-capable network switch, or from a separate PoE injector.

### Available Software Options (required)

#### Dante Controller

Dante Controller is a free software application that enables you to route audio and configure devices on a Dante network. As well as automatic device discovery, one-click signal routing and user-editable device and channel labels, Dante Controller provides essential device status information and powerful real-time network monitoring, including device-level latency and clock stability stats, multicast bandwidth usage, and customized event logging, enabling you to quickly identify and resolve any potential network issues.


#### Dante Via

Dante Via is powerful and easy-to-use software that delivers unprecedented routing of computer-based audio, allowing a wide range of applications and devices to be networked and interconnected, easily and inexpensively. Dante Via network-enables locally-connected USB and Firewire devices, and a huge range of software applications, allowing you to route computer-based audio across an existing Dante network, and create standalone Dante networks without dedicated Dante hardware.

#### Dante Virtual Soundcard

Dante Virtual Soundcard turns your computer into a Dante-powered workstation, seamlessly integrating your PC or Mac with Dante audio devices on your network. You can instantly connect to a Dante network to record, process and playout using any audio application and any combination of Dante-enabled devices.

#### Dante Controller

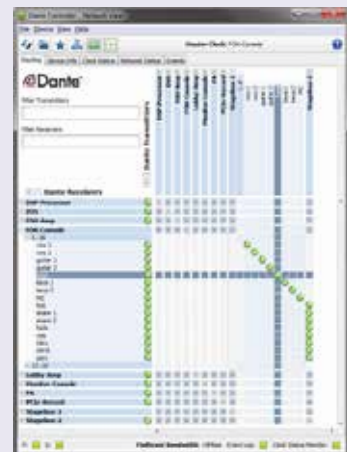

All software can be purchased and downloaded at [amphenolaudio.com/products/dante](http://amphenolaudio.com/products/dante)

Dante™ is a trademark of Audinate Pty Ltd. Audinate® is a registered trademark of Audinate Pty Ltd.

# Data Connectors

## Amphe-Dante Adapters



### Features:

- Dante™ to analogue XLR output adapters
- Line level analogue input to Dante™ audio output adapters
- Dante™ AES3 2 channel input/output adapters
- Dante™ USB input/output adapters
- One channel or Two channel analogue input or output
- Durable overmolded housing
- Resilient cable strain relief
- Shielded RJ45 metal connectors with integrated LED's
- Premium AX Series XLR connectors

PRODUCT	DRAWING Dimensions in mm (inches)	DESCRIPTION	PART NO.
<b>ANALOGUE OUTPUT</b>			
		Analogue Output - 1 channel, RJ45 input to XLR output, Durable overmolded housing	RJD1112-0050
		Analogue Output - 2 channel, RJ45 input to XLR output, Durable overmolded housing	RJD1212-0050
<b>ANALOGUE INPUT</b>			
		Analogue line level Input - 1 channel XLR input to RJ45 output, Durable overmolded housing	RJD2103-0050
		Analogue line level Input - 2 channel XLR input to RJ45 output, Durable overmolded housing	RJD2203-0050
<b>AES3</b>			
		AES3 Input / Output - 2 channel XLR I/O to RJ45 I/O, Durable overmolded housing	RJD32A3-0050
<b>USB</b>			
		USB Input / Output - 2 channel USB I/O to RJ45 I/O Durable overmolded housing	RJD32U1-0050

# SPECIFICATIONS

		ANALOG INPUT 1CH	ANALOG INPUT 2CH	ANALOG OUTPUT 1CH	ANALOG OUTPUT 2CH	AES3 I/O 2 IN 2 OUT	USB I/O 2 IN 2 OUT
<b>GENERAL</b>	Connectors	1 XLR-F	2 XLR-F	RJ45	RJ45	RJ45	RJ45
		RJ45	RJ45	1 XLR-M	2 XLR-M	1 XLR-M, 1 XLR-F	USB 2.0 Type A
<b>ELECTRICAL</b>	Power Consumption	< 2 Watt					
	Power over Ethernet (Required)	Class 1 IEEE 802.3af POE PD compliant					PoE or USB
<b>ANALOG / DIGITAL AUDIO</b>	Max Signal Level (Balanced)	+24dBu / +4dBu / 0dBu / 0dBV / -10dBV		+18dBu / +4dBu / 0dBu / 0dBV / -10dBV		-	-
	Impedance	20k Ohm balanced 10k Ohm unbalanced		150 Ohm balanced 75 Ohm unbalanced		110 Ohm balanced	-
	Frequency Response	20Hz to 20 kHz (+/-0.5db)		20Hz to 20 kHz (+/-0.5db)		-	-
	Dynamic Range	> 100dB		> 100dB		-	-
	Signal to Noise	> 100dB		> 100dB		> 135dB	-
	Total Harmonic Distortion	< 0.01% at +4dBu		< 0.01% at +4dBu		-	-
	Channel Separation	N/A	> 100 dB	N/A	> 100 dB		-
	Channel Matching	N/A	< 0.25 dB	N/A	< 0.25 dB		-
<b>DANTE® AUDIO</b>	Asynchronous Sample Rate Conversion	-		-		Yes	-
	Sample Rate	44.1 kHz, 48 kHz (default), and 96 kHz					48 kHz
	Bit Depth	24 bits					
	Network Speed	100 Mbps					
	Network Interface	Latency from 1ms					
	Network Transport	Dante Audio over IP, AES67 RTP					
<b>CLIMATIC</b>	Protection Class	IP40					
	Operating Temperature	-5°C to +60°C (23°F to +140°F)					
<b>MECHANICAL</b>	Insertion and Withdrawal Force	≥10N - ≤35N					
	Weight	136g (0.299lb)	192g (0.423lb)	136g (0.299lb)	192g (0.423lb)	192g (0.423lb)	110g (0.243lb)
<b>MATERIALS</b>	Housing	PVC 60P Black					

Rev 4 - 09/2018

## LED STATUS

LEFT LED      RIGHT LED



FUNCTION	LEFT LED	RIGHT LED	COMMENT
Off	OFF	OFF	No Power
Device is booting	Solid GREEN	Solid RED	
Slave with sync	Blinking GREEN	Solid GREEN	Normal operation
Clock Master	Blinking GREEN	Blinking GREEN	Normal operation
Any runtime error	Blinking GREEN	Blinking RED	Normal operation
Identify	Alternating RED and GREEN	Alternating RED and GREEN	Blinking for 6 seconds (cycle every 0.5 seconds)
Failsafe (bootloader)	Blinking RED	Blinking RED	Failsafe, Corrupt Capability (red in DC)
Upgrade (bootloader)	Blinking ORANGE	Blinking ORANGE	Device is upgrading