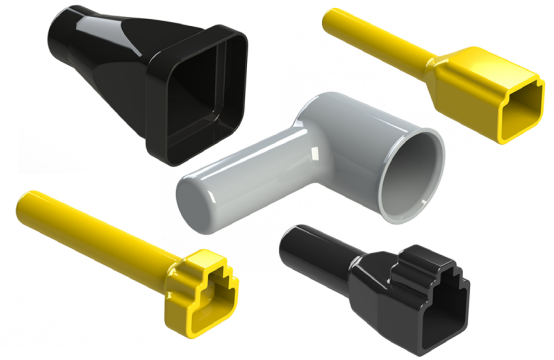




# A Series™ Boots



## Protective Backshell Boots

Available for a wide variety of A Series™ product lines

Amphenol Sine Systems' **A Series™ Boots** provide an optional protective backshell covering for harsh environmental and industrial applications in -29°C to +100°C conditions. Currently available for use with **ARB, AT, ATM, ATP** and **DuraMate Series™** connectors that do not include an endcap or shrinkboot strain relief.

The boots come in a variety of colors (Yellow, Black and Grey) and are made of high-quality PVC.

**Applications:** Heavy Equipment, Agriculture, Construction, Transportation, Off-Road, Mining, Industrial, Railway, Automotive, Diagnostics, Marine, Water Resistance, Harsh Environments






A Series™ Family



Standard products. Custom solutions  
Customer Service +1 800 394 7732

ARB Series™ - Boots

Image	Part Number	Description	Material	Temperature Range
	ARB48-60-BT	48 & 60 Pos. Boot, Straight, ARB Series™, PVC, Black Body	PVC	-29°C to +100°C
	ARB102-BT	102 & 128 Pos. Boot, Straight, ARB Series™, PVC, Black Body	PVC	-29°C to +100°C
	ARB102-BT-RA	102 & 128 Pos. Boot, Right Angle, ARB Series™, PVC, Black Body	PVC	-29°C to +100°C

AT Series™ - Boots















Image	Part Number	Description	Material	Temperature Range
	AT2P-BT	2 Position, Receptacle Boot, AT Series™, PVC, Grey Body	PVC	-29°C to +100°C
	AT2P-BT-BK	2 Position, Receptacle Boot, AT Series™, PVC, Black Body	PVC	-29°C to +100°C
	AT2P-BT-YW	2 Position, Receptacle Boot, AT Series™, PVC, Yellow Body	PVC	-29°C to +100°C
	AT3P-BT	3 Position, Receptacle Boot, AT Series™, PVC, Grey Body	PVC	-29°C to +100°C
	AT3P-BT-BK	3 Position, Receptacle Boot, AT Series™, PVC, Black Body	PVC	-29°C to +100°C
	AT3P-BT-YW	3 Position, Receptacle Boot, AT Series™, PVC, Yellow Body	PVC	-29°C to +100°C
	AT4P-BT	4 Position, Receptacle Boot, AT Series™, PVC, Grey Body	PVC	-29°C to +100°C
	AT4P-BT-BK	4 Position, Receptacle Boot, AT Series™, PVC, Black Body	PVC	-29°C to +100°C

Image	Part Number	Description	Material	Temperature Range
	AT4P-BT-YW	4 Position, Receptacle Boot, AT Series™, PVC, Yellow Body	PVC	-29°C to +100°C
	AT6P-BT	6 Position, Receptacle Boot, AT Series™, PVC, Grey Body	PVC	-29°C to +100°C
	AT6P-BT-BK	6 Position, Receptacle Boot, AT Series™, PVC, Black Body	PVC	-29°C to +100°C
	AT6P-BT-YW	6 Position, Receptacle Boot, AT Series™, PVC, Yellow Body	PVC	-29°C to +100°C
	AT8P-BT	8 Position, Receptacle Boot, AT Series™, PVC, Grey Body	PVC	-29°C to +100°C
	AT8P-BT-BK	8 Position, Receptacle Boot, AT Series™, PVC, Black Body	PVC	-29°C to +100°C
	AT8P-BT-YW	8 Position, Receptacle Boot, AT Series™, PVC, Yellow Body	PVC	-29°C to +100°C
	AT12P-BT	12 Position, Receptacle Boot, AT Series™, PVC, Grey Body	PVC	-29°C to +100°C
	AT12P-BT-BK	12 Position, Receptacle Boot, AT Series™, PVC, Black Body	PVC	-29°C to +100°C
	AT12P-BT-YW	12 Position, Receptacle Boot, AT Series™, PVC, Yellow Body	PVC	-29°C to +100°C
	AT2S-BT	2 Position, Plug Boot, AT Series™, PVC, Grey Body	PVC	-29°C to +100°C

Image	Part Number	Description	Material	Temperature Range
	AT2S-BT-BK	2 Position, Plug Boot, AT Series™, PVC, Black Body	PVC	-29°C to +100°C
	AT2S-BT-YW	2 Position, Plug Boot, AT Series™, PVC, Yellow Body	PVC	-29°C to +100°C
	AT3S-BT	3 Position, Plug Boot, AT Series™, PVC, Grey Body	PVC	-29°C to +100°C
	AT3S-BT-BK	3 Position, Plug Boot, AT Series™, PVC, Black Body	PVC	-29°C to +100°C
	AT3S-BT-YW	3 Position, Plug Boot, AT Series™, PVC, Yellow Body	PVC	-29°C to +100°C
	AT4S-BT	4 Position, Plug Boot, AT Series™, PVC, Grey Body	PVC	-29°C to +100°C
	AT4S-BT-BK	4 Position, Plug Boot, AT Series™, PVC, Black Body	PVC	-29°C to +100°C
	AT4S-BT-YW	4 Position, Plug Boot, AT Series™, PVC, Yellow Body	PVC	-29°C to +100°C
	AT6S-BT	6 Position, Plug Boot, AT Series™, PVC, Grey Body	PVC	-29°C to +100°C
	AT6S-BT-BK	6 Position, Plug Boot, AT Series™, PVC, Black Body	PVC	-29°C to +100°C
	AT6S-BT-YW	6 Position, Plug Boot, AT Series™, PVC, Yellow Body	PVC	-29°C to +100°C

Image	Part Number	Description	Material	Temperature Range
	AT8S-BT	8 Position, Plug Boot, AT Series™, PVC, Grey Body	PVC	-29°C to +100°C
	AT8S-BT-BK	8 Position, Plug Boot, AT Series™, PVC, Black Body	PVC	-29°C to +100°C
	AT8S-BT-YW	8 Position, Plug Boot, AT Series™, PVC, Yellow Body	PVC	-29°C to +100°C
	AT12S-BT	12 Position, Plug Boot, AT Series™, PVC, Grey Body	PVC	-29°C to +100°C
	AT12S-BT-BK	12 Position, Plug Boot, AT Series™, PVC, Black Body	PVC	-29°C to +100°C
	AT12S-BT-YW	12 Position, Plug Boot, AT Series™, PVC, Yellow Body	PVC	-29°C to +100°C

ATM Series™ - Boots






Image	Part Number	Description	Material	Temperature Range
	ATM2P-BT	2 Position, Receptacle Boot, ATM Series™, PVC, Grey Body	PVC	-29°C to +100°C
	ATM2P-BT-BK	2 Position, Receptacle Boot, ATM Series™, PVC, Black Body	PVC	-29°C to +100°C
	ATM2P-BT-YW	2 Position, Receptacle Boot, ATM Series™, PVC, Yellow Body	PVC	-29°C to +100°C
	ATM3P-BT	3 Position, Receptacle Boot, ATM Series™, PVC, Grey Body	PVC	-29°C to +100°C
	ATM3P-BT-BK	3 Position, Receptacle Boot, ATM Series™, PVC, Black Body	PVC	-29°C to +100°C

Image	Part Number	Description	Material	Temperature Range
	ATM3P-BT-YW	3 Position, Receptacle Boot, ATM Series™, PVC, Yellow Body	PVC	-29°C to +100°C
	ATM4P-BT	4 Position, Receptacle Boot, ATM Series™, PVC, Grey Body	PVC	-29°C to +100°C
	ATM4P-BT-BK	4 Position, Receptacle Boot, ATM Series™, PVC, Black Body	PVC	-29°C to +100°C
	ATM4P-BT-YW	4 Position, Receptacle Boot, ATM Series™, PVC, Yellow Body	PVC	-29°C to +100°C
	ATM6P-BT	6 Position, Receptacle Boot, ATM Series™, PVC, Grey Body	PVC	-29°C to +100°C
	ATM6P-BT-BK	6 Position, Receptacle Boot, ATM Series™, PVC, Black Body	PVC	-29°C to +100°C
	ATM6P-BT-YW	6 Position, Receptacle Boot, ATM Series™, PVC, Yellow Body	PVC	-29°C to +100°C
	ATM8P-BT	8 Position, Receptacle Boot, ATM Series™, PVC, Grey Body	PVC	-29°C to +100°C
	ATM8P-BT-BK	8 Position, Receptacle Boot, ATM Series™, PVC, Black Body	PVC	-29°C to +100°C
	ATM8P-BT-YW	8 Position, Receptacle Boot, ATM Series™, PVC, Yellow Body	PVC	-29°C to +100°C
	ATM12P-BT	12 Position, Receptacle Boot, ATM Series™, PVC, Grey Body	PVC	-29°C to +100°C

Image	Part Number	Description	Material	Temperature Range
	ATM12P-BT-BK	12 Position, Receptacle Boot, ATM Series™, PVC, Black Body	PVC	-29°C to +100°C
	ATM12P-BT-YW	12 Position, Receptacle Boot, ATM Series™, PVC, Yellow Body	PVC	-29°C to +100°C
	ATM2S-BT	2 Position, Plug Boot, ATM Series™, PVC, Grey Body	PVC	-29°C to +100°C
	ATM2S-BT-BK	2 Position, Plug Boot, ATM Series™, PVC, Black Body	PVC	-29°C to +100°C
	ATM2S-BT-YW	2 Position, Plug Boot, ATM Series™, PVC, Yellow Body	PVC	-29°C to +100°C
	ATM3S-BT	3 Position, Plug Boot, ATM Series™, PVC, Grey Body	PVC	-29°C to +100°C
	ATM3S-BT-BK	3 Position, Plug Boot, ATM Series™, PVC, Black Body	PVC	-29°C to +100°C
	ATM3S-BT-YW	3 Position, Plug Boot, ATM Series™, PVC, Yellow Body	PVC	-29°C to +100°C
	ATM4S-BT	4 Position, Plug Boot, ATM Series™, PVC, Grey Body	PVC	-29°C to +100°C
	ATM4S-BT-BK	4 Position, Plug Boot, ATM Series™, PVC, Black Body	PVC	-29°C to +100°C
	ATM4S-BT-YW	4 Position, Plug Boot, ATM Series™, PVC, Yellow Body	PVC	-29°C to +100°C

Image	Part Number	Description	Material	Temperature Range
	ATM6S-BT	6 Position, Plug Boot, ATM Series™, PVC, Grey Body	PVC	-29°C to +100°C
	ATM6S-BT-BK	6 Position, Plug Boot, ATM Series™, PVC, Black Body	PVC	-29°C to +100°C
	ATM6S-BT-YW	6 Position, Plug Boot, ATM Series™, PVC, Yellow Body	PVC	-29°C to +100°C
	ATM8S-BT	8 Position, Plug Boot, ATM Series™, PVC, Grey Body	PVC	-29°C to +100°C
	ATM8S-BT-BK	8 Position, Plug Boot, ATM Series™, PVC, Black Body	PVC	-29°C to +100°C
	ATM8S-BT-YW	8 Position, Plug Boot, ATM Series™, PVC, Yellow Body	PVC	-29°C to +100°C
	ATM12S-BT	12 Position, Plug Boot, ATM Series™, PVC, Grey Body	PVC	-29°C to +100°C
	ATM12S-BT-BK	12 Position, Plug Boot, ATM Series™, PVC, Black Body	PVC	-29°C to +100°C
	ATM12S-BT-YW	12 Position, Plug Boot, ATM Series™, PVC, Yellow Body	PVC	-29°C to +100°C

ATP Series™ - Boots




	ATP2P-BT	2 Position, Receptacle Boot, ATP Series™, PVC, Grey Body	PVC	-29°C to +100°C
	ATP2P-BT-BK	2 Position, Receptacle Boot, ATP Series™, PVC, Black Body	PVC	-29°C to +100°C



Image	Part Number	Description	Material	Temperature Range
	ATP2P-BT-YW	2 Position, Receptacle Boot, ATP Series™, PVC, Yellow Body	PVC	-29°C to +100°C
	ATP4P-BT	4 Position, Receptacle Boot, ATP Series™, PVC, Grey Body	PVC	-29°C to +100°C
	ATP4P-BT-BK	4 Position, Receptacle Boot, ATP Series™, PVC, Black Body	PVC	-29°C to +100°C
	ATP4P-BT-YW	4 Position, Receptacle Boot, ATP Series™, PVC, Yellow Body	PVC	-29°C to +100°C
	ATP6P-BT	6 Position, Receptacle Boot, ATP Series™, PVC, Grey Body	PVC	-29°C to +100°C
	ATP6P-BT-BK	6 Position, Receptacle Boot, ATP Series™, PVC, Black Body	PVC	-29°C to +100°C
	ATP6P-BT-YW	6 Position, Receptacle Boot, ATP Series™, PVC, Yellow Body	PVC	-29°C to +100°C
	ATP2S-BT	2 Position, Plug Boot, ATP Series™, PVC, Grey Body	PVC	-29°C to +100°C
	ATP2S-BT-BK	2 Position, Plug Boot, ATP Series™, PVC, Black Body	PVC	-29°C to +100°C
	ATP2S-BT-YW	2 Position, Plug Boot, ATP Series™, PVC, Yellow Body	PVC	-29°C to +100°C
	ATP4S-BT	4 Position, Plug Boot, ATP Series™, PVC, Grey Body	PVC	-29°C to +100°C

Image	Part Number	Description	Material	Temperature Range
	ATP4S-BT-BK	4 Position, Plug Boot, ATP Series™, PVC, Black Body	PVC	-29°C to +100°C
	ATP4S-BT-YW	4 Position, Plug Boot, ATP Series™, PVC, Yellow Body	PVC	-29°C to +100°C
	ATP6S-BT	6 Position, Plug Boot, ATP Series™, PVC, Grey Body	PVC	-29°C to +100°C
	ATP6S-BT-BK	6 Position, Plug Boot, ATP Series™, PVC, Black Body	PVC	-29°C to +100°C
	ATP6S-BT-YW	6 Position, Plug Boot, ATP Series™, PVC, Yellow Body	PVC	-29°C to +100°C

DuraMate™ AHDP & AHDM Series - Boots









	AHDPM18-BT	Shell Size 18, Boot, for DuraMate™ AHDP (SRA only) & AHDM, PVC, Grey Color	PVC	-29°C to +100°C
	AHDPM18-BT-BK	Shell Size 18, Boot, for DuraMate™ AHDP (SRA only) & AHDM, PVC, Black Color	PVC	-29°C to +100°C
	AHDPM18-BT-RA	Shell Size 18, Right Angle Boot, DuraMate™ AHDP & AHDM, PVC, Grey Color	PVC	-29°C to +100°C
	AHDPM18-BT-RA-BK	Shell Size 18, Right Angle Boot, DuraMate™ AHDP & AHDM, PVC, Black Color	PVC	-29°C to +100°C
	AHDPM24-BT	Shell Size 24, Boot, for DuraMate™ AHDP (SRA only) & AHDM, PVC, Grey Color	PVC	-29°C to +100°C

Image	Part Number	Description	Material	Temperature Range
	AHDPM24-BT-BK	Shell Size 24, Boot, for DuraMate™ AHDP (SRA only) & AHDM, PVC, Black Color	PVC	-29°C to +100°C
	AHDPM24-BT-RA	Shell Size 24, Right Angle Boot, DuraMate™ AHDP & AHDM, PVC, Grey Color	PVC	-29°C to +100°C
	AHDPM24-BT-RA-BK	Shell Size 24, Right Angle Boot, DuraMate™ AHDP & AHDM, PVC, Black Color	PVC	-29°C to +100°C