



Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten.



After soldering wires on the insert with contacts, then we press it into the housing

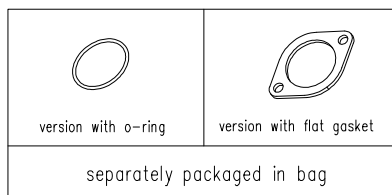

2 designed acc. pollution degree 2, can be used under pollution degree 3 when the rules of IEC 60644-1 are fulfilled
3 under operating conditions $>10^4$ Ohm

Do not connect or disconnect under load. Metal housing parts shall be securely incorporated to protected ground.

Remark for gold plated contacts:
In order to avoid brittle inter-metallic connections, gold plated terminals have to be tin-plated in the solder area.

All technical data have been measured in a laboratory environment and can be different during practical usage of the product. Any product information is for descriptive usage only and not legally binding, particularly the information does not constitute or provide any legal guaranties ("Beschaffenheitsgarantie" or "Eigenschaftsgarantie").

Gewicht (errechnet) / Calc WT :				Zul. Abw./Tolerances :				Maßstab / Scale :				A3					
 Prüfmaß / Testdimension				ISO 2768-C				 DIN / ISO 13715				CUSTOMER DRAWING					
Teileindex / Partindexnumber:																	
Bagatelle change:												Female receptacle Quicklock two-hole flange, solder type					
				24	Datum / Date		None										
				Gez.	28.09.		Lee										
				Drawn													
				Gepr.													
				Checked													
				Amphenol-Tuchel Industrial GmbH								M C091 31TXXX XOY 5 U				Blatt / Sheet 1	
																1 Bl.	
01 CATI-202306002				28.09.24		Lee											
Index		Änderung / Description		Datum / Date		Name		Ers. f. / Replacement for :									

	NYM_V01	EAL2021_002818
--	---------	----------------